

## CHAPTER 8: TIRE

8-1	SPECIFICATIONS, CONSTRUCTION AND HANDLING PROCEDURES ON TIRES .....	8-1
-----	--	-----




## CHAPTER 8: TIRE

### 8-1: SPECIFICATIONS, CONSTRUCTION AND HANDLING PROCEDURES ON TIRES

#### A. SPECIFICATIONS

	Subaru 360 Sedan	Subaru 360 Custom
Tire	4.80 x 10 - 2P	4.50 x 10 - 4P
Rim	3.00D x 10	3.00D x 10
Tire Width	Approx. 121 mm (4.76 in)	Approx. 122 mm (4.84 in)
Tire Outer Diameter	Approx. 500 mm (19.6 in)	Approx. 485 mm (19.0 in)
Valve	TR-244	TR-244
Standard Air Pressure		
Front Tire	0.85-0.99 kg/cm <sup>2</sup> (12-14 psi)	0.9-1.0 kg/cm <sup>2</sup> (13-14 psi)
Rear Tire	1.7-1.85 kg/cm <sup>2</sup> (24-26 psi)	1.9-2.0 kg/cm <sup>2</sup> (27-28.5 psi)
Spare Tire	1.85 kg/cm <sup>2</sup> (26 psi)	2.0 kg/cm <sup>2</sup> (28.5 psi)

#### B. FUNCTION AND CONSTRUCTION

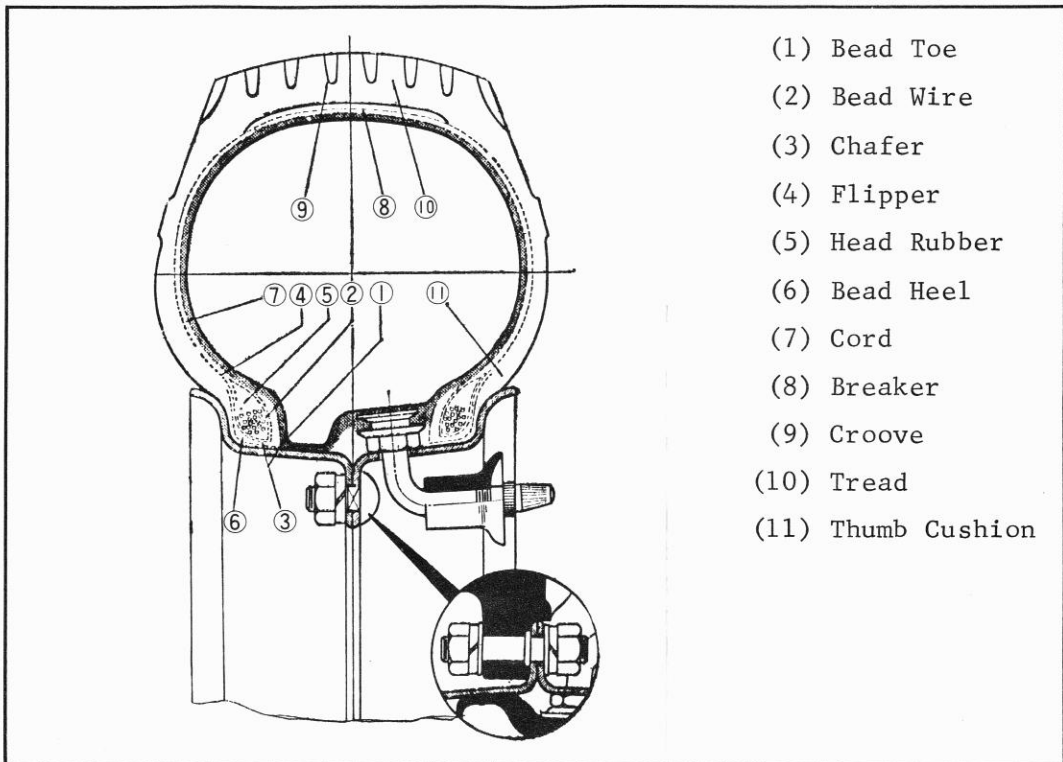

- (1) Bead Toe
- (2) Bead Wire
- (3) Chafer
- (4) Flipper
- (5) Head Rubber
- (6) Bead Heel
- (7) Cord
- (8) Breaker
- (9) Groove
- (10) Tread
- (11) Thumb Cushion